

## 8 Channel Full Function 960H DVR



### Features

- Up to 8 cameras with 1080P realtime preview
- H.264 dual-stream video compression
- Full channel @960H(960×576/960×480) realtime recording and playback
- HDMI/VGA/TV simultaneous video output
- Support P2P penetration、 Mobile phone push alarm function
- Support 2 SATA HDD up to 4TB
- Multiple network monitoring: Web viewer、 CMS and Mobile phone




### Technical Specifications

<b>AOP-3708GD</b>	
<b>System</b>	
Operating System	Embedded LINUX
<b>Video</b>	
Input	8 channel, BNC
Standard	NTSC(525Line,60f/s),PAL(625Line,50f/s)
<b>Audio</b>	
Input	8 channel, RCA
Output	1 channel, RCA
<b>Display</b>	

Interface	1 HDMI, 1 VGA, 1 BNC
Resolution	800*600;1024*768;1280*1024;1440*900;1920*1080
Display Split	1/4/8
<b>Recording</b>	
Video/Audio Compression	H.264 / G.711
Resolution	960H(960×576/960×480)/HD1(352×576/352×480)/CIF(352×288/352×240)
Record Rate	All channel@960H (25/30fps)
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop
Record Interval	15 ~ 60min (default:60min);Pre-record:5sec;Alarm-record: 30 ~ 300sec
<b>Video Detection &amp; Alarm</b>	
Trigger Events	Recording , Alarm , Video Push , Email, Buzzer
Video Detection	Motion Detection、 Video Loss、 HDD Loss
Alarm Input	8 channel
Relay Output	1 channel
<b>Playback &amp; Backup</b>	
Sync Playback	1/4/8
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second)
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode	USB Device / Internal SATA burner/ Network
<b>Network</b>	
Ethemet	RJ-45 port (10/100M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, DHCP, DNS, PPPOE, DDNS
Max.User Access	10 users
Mobile Phone	IPhone, IPad, Android
<b>Storage</b>	
Internal HDD	2 SATA ports (2HDDs or 1HDDs+1CD/DVD-RW), up to 4TB
<b>Auxiliary Interface</b>	
USB Interface	3 ports (1 Rear), USB2.0
RS232	Yes
RS485	1 port, For PTZ control
<b>General</b>	
Power Supply	DC12V/5A
Power Consumption	20W(without HDD)
Working Environment	-10 ~ +55°C / 10~90%RH / 86~106kpa
Dimension(W*D*H)	375x276x51 (mm)
Weight	1.5-2.0kg(without HDD)

## Structure

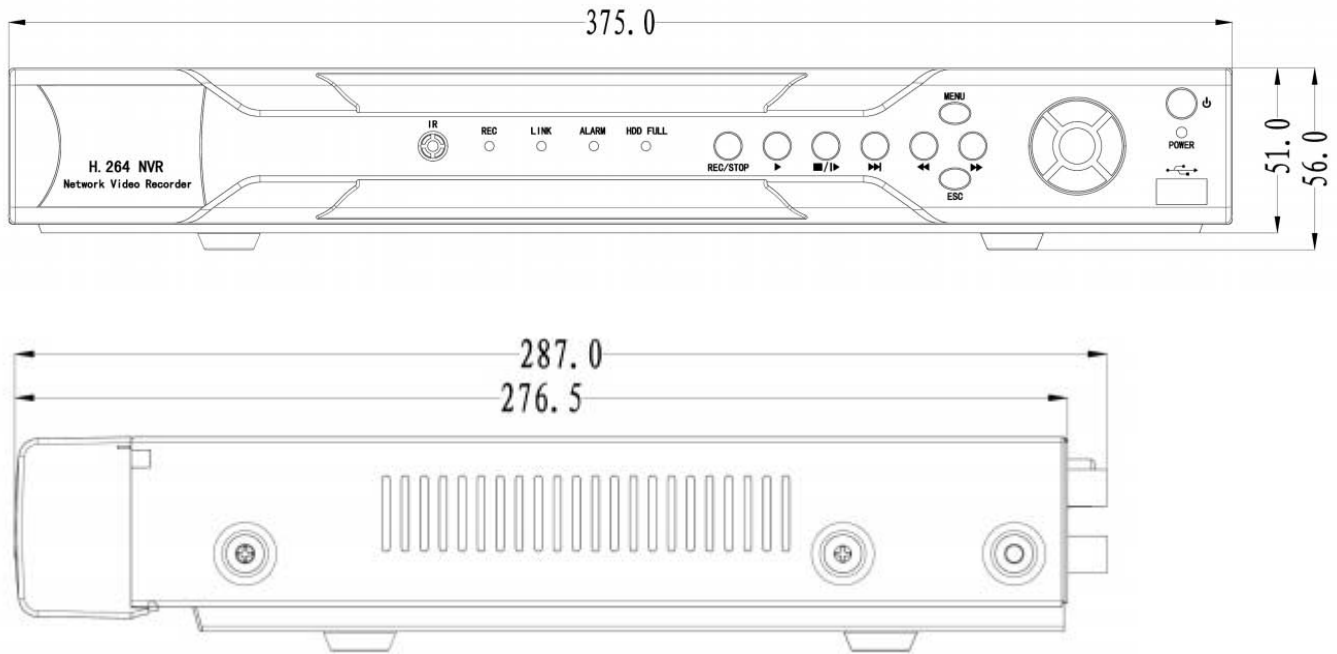

## Appearance

